

# ATRIA II 6

REIMAGINING PERFORMANCE SPACES

SPECIFICATION SHEET  
OUTDOOR / NATATORIUM

## Housing

Diameter : Ø6.4" | Height : 15" | Weight : 19.8 lbs

## Material

Housing : High Pressure Die-Cast Aluminum

Optics : Aluminum Reflector

## Power Input

40W, 60W, 80W, 100W | 120-277V

## Lumen Output

3,140 lm (40W), 5,155 lm (60W), 6,930 lm (80W), 9,110 lm (100W)

## Dimming

Standard 0-10V : Dims to 10%

DALI : Dims to 10%

## Color Quality

CRI 85, CRI 93

## Rated Life

> 100,000 Hours (L70)

## Finish




Matte Black Matte White

## Color Temperature



2700K 3000K 3500K 4000K

## Optics



40°

60°

Wide

## Mounting



Stem  
Mount

Adjustable  
Cable

Wall  
Mount

Yoke  
Mount

Surface  
Mount

## Warranty

5 Year limited warranty


## Listing



## Versatile and Compact Architectural Cylinder

Engineered for performance spaces, this cylinder offers versatile mounting and advanced dimming options. It seamlessly blends into ceilings, delivering powerful performance with vibrant, color-changing technology that elevates any stage environment.

With its next-gen design, the Atria Mark II features an upgraded light engine that boasts a 30% increase in lighting output across the series and introduces a new SilentBlack™ finish that reduces reflectance to under 5%.

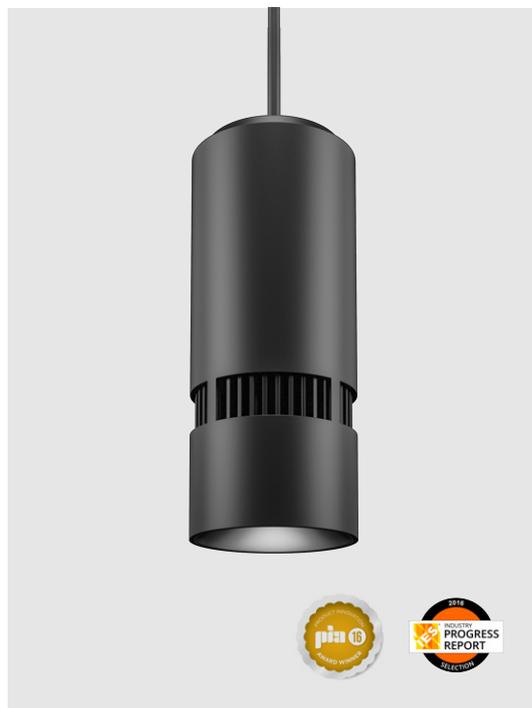

METEOR

meteor-lighting.com

**SPECIFICATION**

PROJECT NAME

DATE

CATALOG #

QUANTITY

The product configurator function on this page works only with the latest version of Chrome or Adobe Acrobat Reader.

<input type="text" value="ASII6"/>	MODEL	<b>ATRIA II 6</b>		
<input type="text"/>	WATTAGE	<b>40</b> 40W <b>100</b> 100W	<b>60</b> 60W	<b>80</b> 80W
<input type="text"/>	CCT / CRI	<b>278</b> 2700K / CRI 85 <b>309</b> 3000K / CRI 93 <b>408</b> 4000K / CRI 85	<b>279</b> 2700K / CRI 93 <b>358</b> 3500K / CRI 85	<b>308</b> 3000K / CRI 85 <b>359</b> 3500K / CRI 93
<input type="text" value="UNV"/>	VOLTAGE	<b>UNV</b> 120 – 277V		
<input type="text"/>	DIMMING	<b>STV</b> Standard 0-10V dims to 10%	<b>DALI</b> DALI dims to 10%	
<input type="text"/>	BEAM ANGLE	<b>40</b> 40°	<b>60</b> 60°	<b>WD<sup>1</sup></b> Wide
<input type="text"/>	FINISH	<b>BLK</b> SilentBlack™, Matte Finish	<b>WHT</b> SilentWhite™, Matte Finish	
<input type="text"/>	MOUNTING	<b>SUM</b> Surface Mount <b>AD10</b> Adjustable Cable 10ft <b>WLM</b> Wall Mount	<b>ST2</b> Stem 2ft <b>SAD10</b> Sloped Adjustable Cable 10ft	<b>ST4</b> Stem 4ft <b>YKM</b> Yoke Mount
<input type="text"/>	ACCESSORIES	<b>SPD<sup>2</sup></b> Surge Protector	<b>CT<sup>3</sup></b> Conduit Mount	
<input type="text"/>	RATING	<b>OUT<sup>4</sup></b> Outdoor Rating	<b>NAT<sup>5</sup></b> Natatorium Rating	

CLEAR FORM

<sup>1</sup> WD option reduces delivered lumens by ~20%  
<sup>2</sup> Surge protector for up to 10KV. Applicable for unstable mains or facilities using high power machineries  
<sup>3</sup> CT is not compatible with SUM, YKM, WLM  
<sup>4</sup> Outdoor Rating: Coating and wiring will be changed to high UV resistant and corrosion resistant materials for long-term operation in outdoor environments  
<sup>5</sup> Natatorium Rating: Coating and sealant will be changed to high corrosion resistant materials to prevent damage from long-term exposure to chlorine vapors

**TECHNICAL DETAILS**

**Electrical**

- 3,140 lm (40W), 5,155 lm (60W), 6,930 lm (80W), 9,110 lm (100W)
- Power Input : Universal (120-277V)
- Operating Temperature : -22°F~113°F
- Surge Protection : Built-in is 4KV

**LED Features**

- Color Temperature : 2700K, 3000K, 3500K, 4000K
- CRI 85, CRI 93
- Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 100,000 Hrs
- Lumen Maintenance > 0.90 at 60,000 hours

**Optics**

- Aluminum Reflector
- Beam Angle : 40°, 60°, WD

**Advanced Dimming**

- Proprietary VX Driver™ is incorporated to all dimming options for video flicker-free lighting
- Standard 0-10V : Dims to 10%
- DALI : Dims to 10%

**Housing**

- Diameter : Ø6.4"
- Height : 15"
- Material : High Pressure Die-Cast Aluminum
- Weight : 19.8 lbs

**Mounting**

- Stem 2ft or 4ft; 45° Swivel Canopy Included
- Adjustable Cable 10ft
- Sloped Adjustable Cable 10ft
- Surface Mount
- Wall Mount
- Yoke Mount

**Warranty**

- 5-year limited warranty

**Listing**

- ETL Wet Location Listed
- CE
- FCC
- UKCA
- IP65 Rated

**PERFORMANCE SUMMARY\***

STD (Standard)				
CCT/WATTAGE	2700K	3000K	3500K	4000K
<b>40W</b>	2,760lm	2,850lm	2,985lm	3,140lm
<b>60W</b>	4,605lm	4,990lm	5,095lm	5,155lm
<b>80W</b>	6,195lm	6,710lm	6,860lm	6,930lm
<b>100W</b>	8,145lm	8,825lm	9,015lm	9,110lm


Current Consumption		
WATTAGE / VOLT	120V	277V
<b>40W</b>	0.37A	0.16A
<b>60W</b>	0.55A	0.24A
<b>80W</b>	0.73A	0.32A
<b>100W</b>	0.92A	0.4A

\*Beam Angle: 40° \*Tolerance ±8%


\*For specifications requiring a CRI of 93, apply a 0.75 multiplier to the lumen output values listed.

**PHOTOMETRICS**


Below is a typical photometric representation of the Atria II 6 fixture. Please download IES files to ensure exact photometric value.



40°





60°



Wide

**DIMENSIONS**

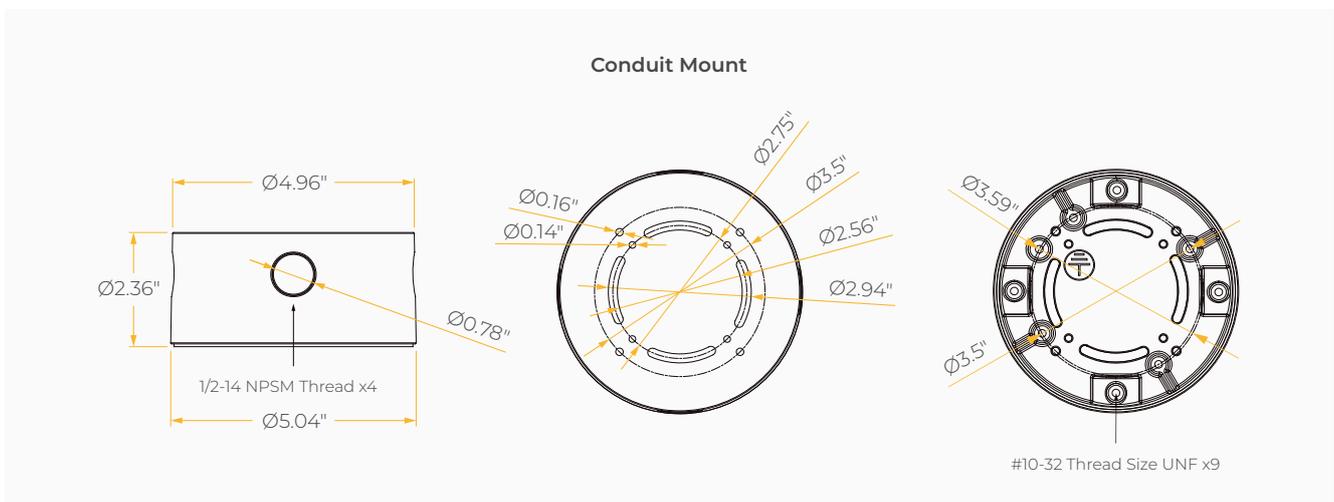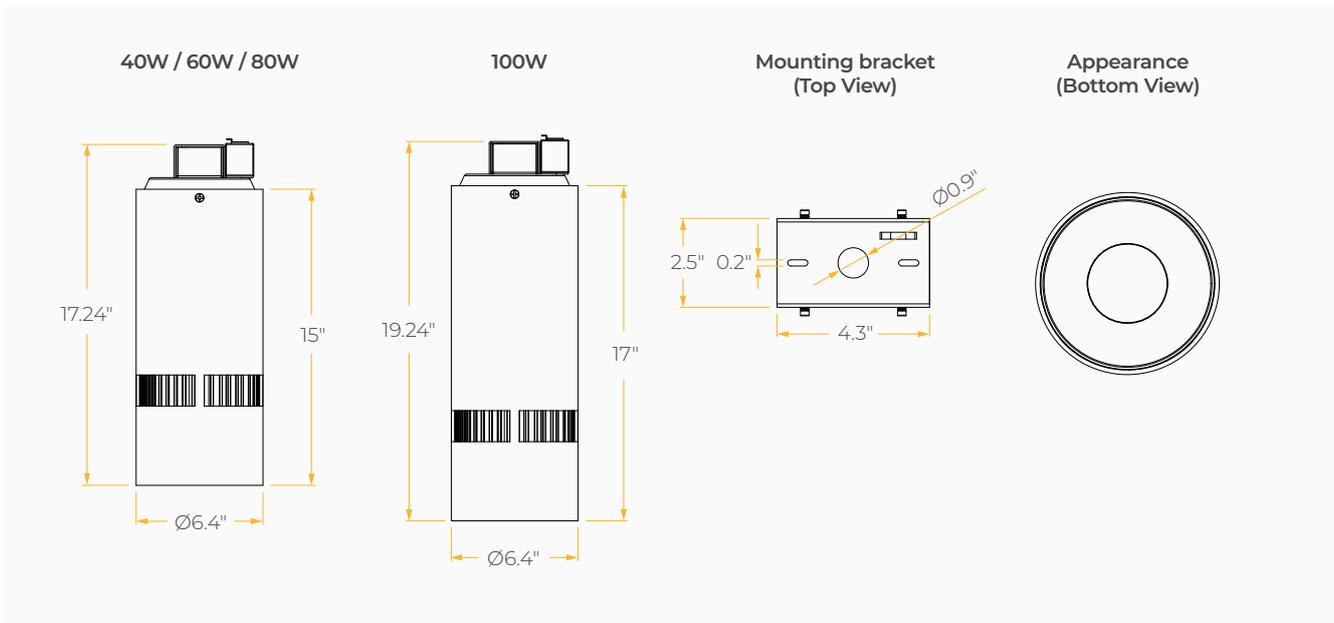

**MOUNTING OPTIONS\***

\*Junction Box not included

