

DEXT 3.0

REDEFINING HIGH CEILING EXCELLENCE

SPECIFICATION SHEET
STANDARD (INDOOR)

Housing

Diameter : Ø17.86" | Height : 12.5" | Weight : 27 lbs

Material

Housing : High Pressure Die-Cast Aluminum
Lens : Clear Polycarbonate

Power Input

300W, 400W, 500W | 120-277V

Lumen Output

45,000lm (300W), 59,600lm (400W), 74,000lm (500W)

Dimming

Standard 0-10V : Dims to 10%

Color Quality

CRI 85

Rated Life

> 100,000 Hours (L70)

Finish



Black



White

Color Temperature



3000K



3500K



4000K



5000K

Optics



30°



50°



Wide

Mounting



Bracket



Stem
Mount



Uplight
Stem



Adjustable
Cable

Warranty

5 Year limited warranty

Listing



IK10

Bright. Tough. Efficient.

Introducing Dext 3.0, a compact yet robust high ceiling luminaire that delivers up to 74,000 lumens with nearly 150 lm/W efficacy. Designed for performance and long-term value, it handles harsh environments with ease. Optional features include a glare-reducing shroud, IK10-rated wire guard, and IP65 outdoor configuration—making Dext 3.0 a durable and also an ideal choice for those seeking both quality and value.



METEOR

meteor-lighting.com

SPECIFICATION SHEET / STANDARD (INDOOR)

DEXT 3.0 REDEFINING HIGH CEILING EXCELLENCE



SPECIFICATION

PROJECT NAME

DATE

CATALOG #

QUANTITY

The product configurator function on this page works only with the latest version of Chrome or Adobe Acrobat Reader.

<input type="checkbox"/> DS3	MODEL	DEXT 3.0 SERIES		
<input type="checkbox"/>	WATTAGE	300 300W	400 400W	500 500W
<input type="checkbox"/>	CCT / CRI	308 3000K / CRI 85 508 5000K / CRI 85	358 3500K / CRI 85	408 4000K / CRI 85
<input type="checkbox"/> UNV	VOLTAGE	UNV 120 – 277V		
<input type="checkbox"/>	DIMMING	NOD Non-Dimming	STV Standard 0-10V dims to 10%	
<input type="checkbox"/>	BEAM ANGLE	30 30°	50 50°	WD¹ Wide
<input type="checkbox"/>	FINISH	BLK Black	WHT White	
<input type="checkbox"/>	MOUNTING	BRK Bracket UST2² Uplight Stem 2ft SAD10 Sloped Adjustable Cable 10ft	ST2 Stem 2ft UST4² Uplight Stem 4ft	ST4 Stem 4ft AD10 Adjustable Cable 10ft
<input type="checkbox"/>	ACCESSORIES	ALS Aluminum Shroud	WG³ Wire Guard (IK10 Rating, No Diffuser)	OCC⁴ Occupancy Sensor

CLEAR FORM

¹ WD option reduces delivered lumens by ~20%
² UST is not compatible with 500, ALS, WG
³ WG option reduces delivered lumens by ~14%, and WG is not compatible with ALS
⁴ OCC is not compatible with ALS, OUT, NAT

TECHNICAL DETAILS

Electrical

- 45,000lm (300W), 59,600lm (400W), 74,000lm (500W)
- Power Input : Universal (120-277V)
- Operating Temperature : -22°F~113°F
- Surge Protection : Built-in is 4KV

LED Features

- Color Temperature : 3000K, 3500K, 4000K, 5000K
- CRI 85, UGR < 19
- Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 100,000 Hrs

Optics

- Precision molded high transmittance clear PC lens
- Beam Angle : 30°, 50°, WD

Advanced Dimming

- Proprietary VX Driver™ is incorporated to all dimming options for video flicker-free lighting
- Standard 0-10V : Dims to 10%

Housing

- Diameter : Ø17.86"
- Height : 12.5"
- Material : High Pressure Die-Cast Aluminum, PC Lens
- Weight : 27 lbs

Mounting

- Bracket
- Stem 2ft or 4ft; 45° Swivel Canopy Included
- Uplight Stem 2ft or 4ft
- Adjustable Cable 10ft
- Sloped Adjustable Cable 10ft

Warranty

- 5-year limited warranty

Listing

- ETL Damp Location Listed
- CE
- UKCA
- IK10 (With Wire Guard)

PERFORMANCE SUMMARY*


Delivered Lumens				
CCT/WATTAGE	3000K	3500K	4000K	5000K
300W	42,500lm	43,100lm	43,700lm	45,000lm
400W	56,300lm	57,100lm	57,900lm	59,600lm
500W	70,000lm	71,000lm	72,000lm	74,000lm

*Beam Angle: 50° *Tolerance ±8%


Current Consumption		
WATTAGE / VOLT	120V	277V
300W	2.78A	1.21A
400W	3.71A	1.61A
500W	4.62A	2A

PHOTOMETRICS


Below is a typical photometric representation of the Dext 3.0 fixture. Please download IES files to ensure exact photometric value.

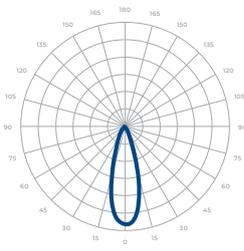


30°

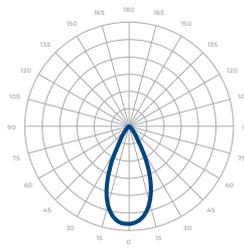


50°

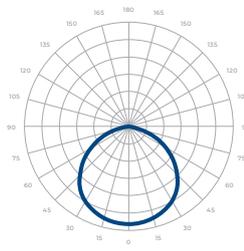


WD

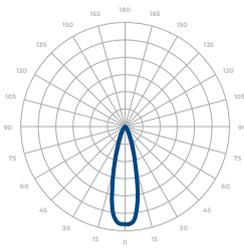

**30° with
Aluminum Shroud**




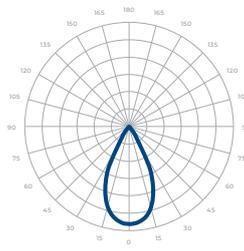


**50° with
Aluminum Shroud**

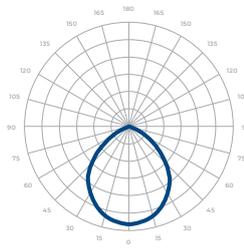


**WD with
Aluminum Shroud**

DIMENSIONS

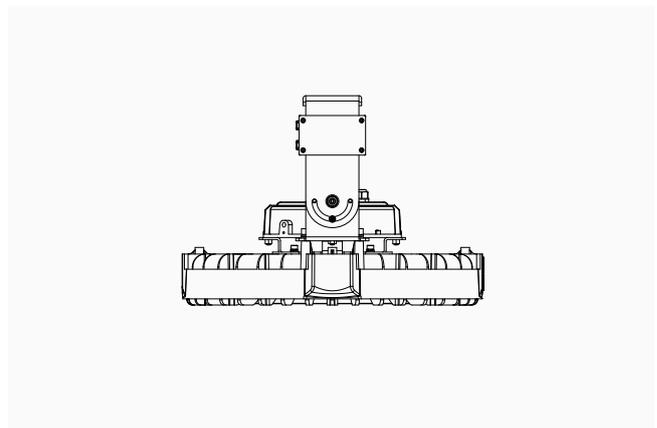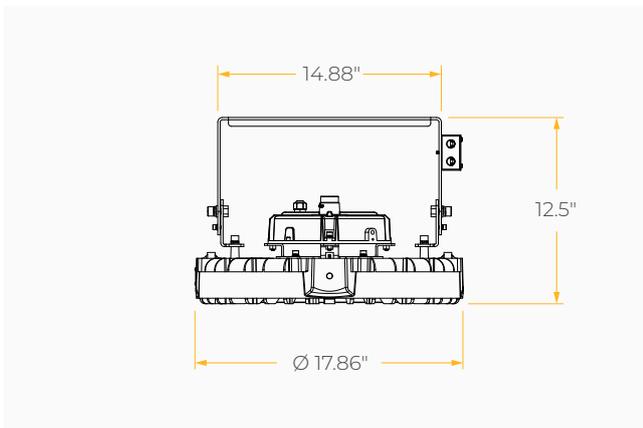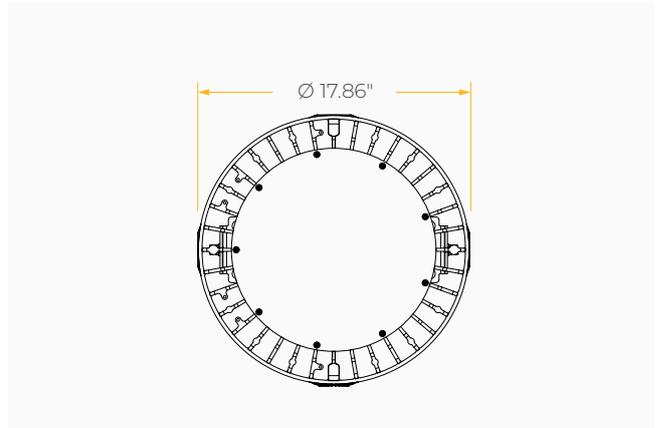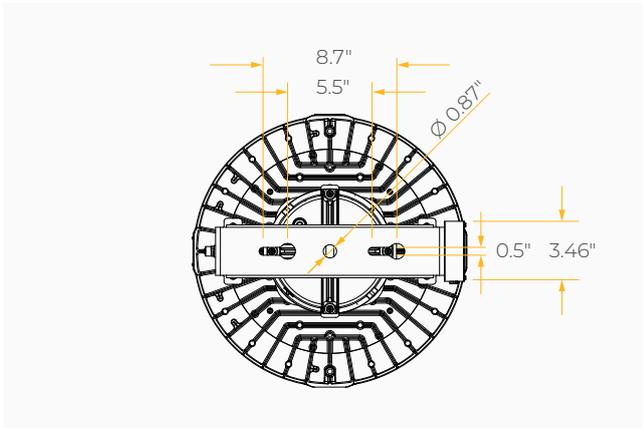


ACCESSORIES


Aluminum Shroud

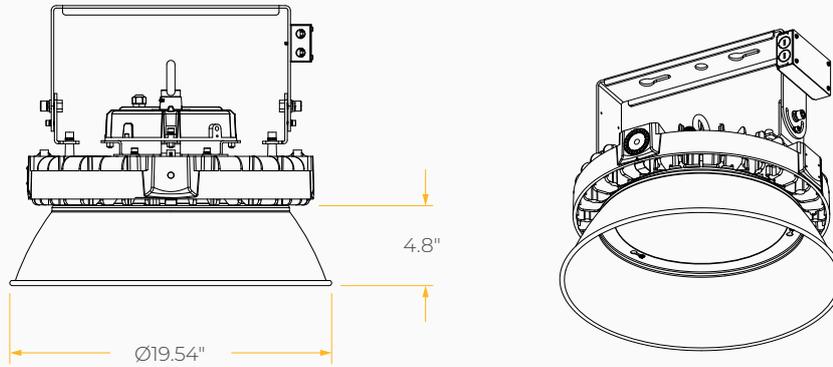

Wire Guard

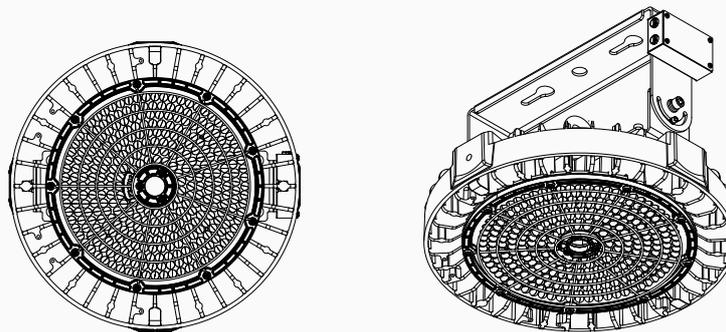

Occupancy Sensor

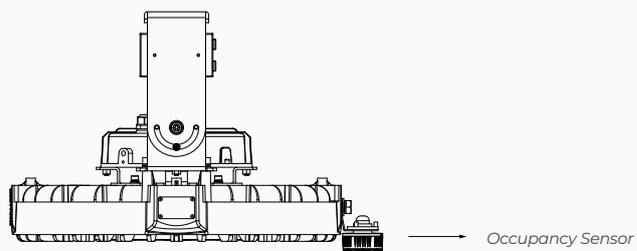

APPEARANCE

300W



400W



500W



MOUNTING OPTIONS*

*Junction Box not included

